


| "A" Heights | "B" | Post | Wall |
|-------------|-----|--------|-------------------|
| 36 inch | | 2" | Sq. Tube x 0.080" |
| 42 inch | | 2" | Sq. Tube x 0.125" |
| 48 inch | | 2 1/2" | Sq. Tube x 0.080" |
| 54 inch | | 2 1/2" | Sq. Tube x 0.125" |
| 60 inch | | 3" | Sq. Tube x 0.125" |
| 72 inch | | | |

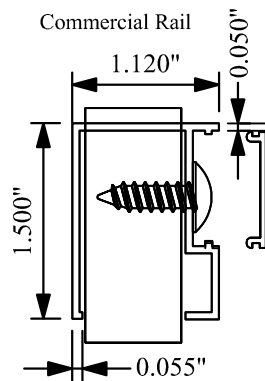

NOTES:

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURERS SPEC.
2. DO NOT SCALE DRAWINGS
3. SPECIFICATIONS SHOWN CAN BE CHANGED ONLY BY THE MANUFACTURER.
4. FOOTING WIDTH: (4) X POST WIDTH
FOOTING DEPTH : MIN. 24"/REC. FREEZE LINE
5. PANELS SHOWN WITH MORTISED POST SYSTEMS.
6. PANELS ARE RACKABLE WHICH MAY CHANGE FACE-TO-FACE DIMENSION

MAVERICK ULTRA PLUS™ COMMERCIAL ALUMINUM

Panel width 6' Camden Flush Bottom 3 Rail Standard